ADU-2110A USB ADSL Modem Quick Installation Guide

Version 1.0

Thank you for purchasing PLANET USB ADSL Modem, ADU-2110A. In this installation guide, it illustrates the driver installation steps for Windows 98SE, ME, 2000, or XP. For more information, please also refer to the **User's manual**.

Package Content

ADU-2110A USB ADSL Modem	x 1
Quick Installation Guide	x 1
Drivers and User's Manual CD	x 1
USB Cable	x 1
RJ-11 Cable	x 1

Before Installation

The USB ADSL modem support the following two modes

- WAN mode support:
  - PPP over ATM LLCSNAP/VCMUX (RFC 2364)
  - PPP over Ethernet LLCSNAP/VCMUX (RFC 2516)
- LAN mode support:
  - Classical IP over ATM (RFC 1577)
  - Bridged IP over ATM LLCSNAP/VCMUX (RFC 1483)

You must get the connection mode and following data from your ISP or phone company to set up ADU-2110A.

ADSL WAN (PPPoE/PPPoA) mode user

- VPI/VCI value
- Encapsulation mode (example: RFC 2364 PPPoA, RFC 2516 PPPoE...etc.)
- Username and password for authentication

ADSL LAN mode user

- VPI/VCI value
- Encapsulation mode(example: RFC 1483, 1577...etc.)
- IP Address, Subnet Mask
- Gateway, DNS related information

Step I: Hardware Installation

1. Turn on your PC
2. Connect the provided RJ-11 cable into LINE port on the real panel of the modem and insert the other end to splitter.
3. Connect the Type-A end of USB cable to your PC.
4. Insert bundled USB driver CD into your CD-ROM drive and follow instruction to install ADU-2110.

Step 2: Driver Installation for both LAN and WAN mode

The following list of driver installation procedures are Windows 98SE, ME, 2000, and XP.

Driver Installation on Windows 98SE/ME

1. When detect new hardware window appears, click **"Cancel"**.

Add New Hardware Wizard
This wizard searches for new drivers for:
ADSL USB MODEM
A device driver is a software program that makes a hardware device work.
< Back
Next >
Cancel

2. Insert **"Easy Setup Software Kit"**, front page of Easy Setup window will appear. Install Driver: Click here to install ADSL USB modem driver.

3. Click **"Install Driver"** and then select the country you are at.
PS. If your country is not on the list, please click "G" to next page.

4. After finish country selecting, the window below will appear. Select the ISP, and then click **"}}"** to next page.

5. Enter your account "User Name, Password and Password Confirm" then click **"}}"** to next page.

6. Confirm modem settings and click **"}}"** to next page.

7. Software kit searches available USB modem

8. After software kit finds the device, operating system starts to load USB driver.

9. For Widows 98SE, system will ask you to insert Windows 98SE installation CD, please insert the CD and click **"OK".**

10. Enter correct file path and click **"OK"**.

Copying Files...
The file 'ATMUI.DLL' on Windows 98 Second Edition CD-ROM cannot be found.
Setup could not find a file on the specified path. If the path appears below, make sure it is correct. Click OK to try copying again.
Copy files from:
D:\win98_english\win98
OK
Cancel
Skip File
Details...

11. System finishes installation and click **"** r **"** to close installation window.

12. Connect your ISP with WAN connections, click **"AccessRunner DSL"** icon.

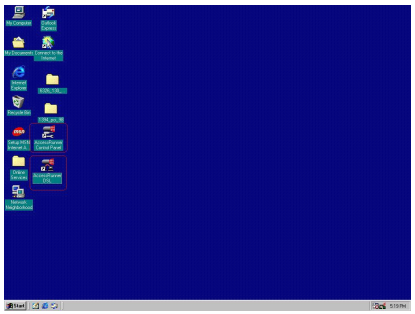

13. Enter correct **"User name and Password"** then click **"Connect"** to connect to your ISP

Driver Installation on Windows 2000/XP

1. When detect new hardware window appears, click "Cancel"

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
ADSL USB MODEM
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

2. The procedures 2 to 8 are same as the procedures of Windows 98SE/ME. Please refer driver installation on Windows 98SE/ME.

9. System finishes installation and click **"** r **"** to close installation window.

10. Connect your ISP with WAN connections, click **"Access-Runner DSL"** icon.

11. Enter correct **"User name and Password"**, and then click **"Connect"** to connect to your ISP.



2011-C30040-000

CE